


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

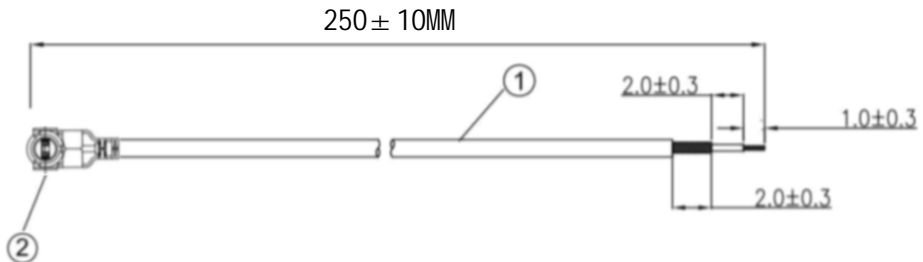

- NOTES:
- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
 - MATERIAL:
 - SEE TABLE
 - ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
②	接头	四代IPEX端子	1
①	同轴线	RG0.81白色线, OD: 0.81mm	AS
深圳市金航标电子有限公司		www.kinghelm.com.cn	
KH-IPEX4-221-RG0.81-WH250		0755-28190160	
ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2020-06-15	四代IPEX TO OPEN RG0.81白色转接线
	ENG.		
COMPUTER GENERATED IN SOLIDWORKS	MFG.		
DO NOT SCALE THIS DRAWING	Q.A.		
PROJECTION	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX $\pm 1^\circ \pm 0.3 \pm 0.25 \pm 0.150$		SIZE Number B
CUSTOMER PIN:			REV A
	SCALE: Free	TYPE	SHEET 1 OF 1